

C-6

Outstanding Performance and
Lightweight design



EF EUROFRIGO

C-6 is a split direct drive refrigeration unit specifically designed for the transportation of fresh and frozen products in medium to large delivery vehicles up to 50 m³. The aluminum chassis grants lowest unit's weight in the industry for maximum payload.

Sleek external design for superior vehicle appearance and extra-flat high capacity evaporator for maximum load volume.

Unsurpassed refrigeration capacity and air flow for maximum peace of mind in any working condition up to 55°C ambient temperature.

- ▶ Best performance in any ambient condition
- ▶ Superior air flow for optimal temperature homogeneity
- ▶ Temperature recovery You can rely on
- ▶ Unsurpassed reliability
- ▶ Aluminum lightweight chassis technology
- ▶ 90% of the unit's components are recyclable
- ▶ Environment friendly
- ▶ Very easy installation



◆ Condenser

Dimensions

1730 x 650 x 570

Weight

Road only: 70kg


Road/stby: 120kg

Refrigeration Capacity (Road upto)

0°C / +30°C: 5.430 W

-20°C / +30°C: 2.760 W

(ATP conditions)

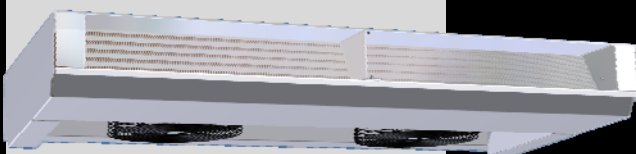

◆ Evaporator 1450

Dimensions

1450 x 750 x 200

Weight

30kg

Air flow

3.000 m³/h



STANDARD EQUIPMENT

- HCFC R404a refrigerant
- Road Compressor: EFQP16, 164 cc, 6-cylinders
- Automatic+manual defrosting system
- Oil separator
- CPR valve
- Liquid Separator/Heat exchanger
- Quick installation hoses+fittings
- Microstat controller
- 12 or 24VDC version

OPTIONAL EQUIPMENT

- 230-400/3/50-60 VAC standby operation (built-in)
- HGS3 Heat valve
- Multi-Temperature configuration
- Drain pan heaters
- Electric heater package

Your local representative

We reserve the right to change technical data and specification without prior notice. Technical data not binding

There's no better way to cool

